


ロングU、土止め付ロングU


(特徴)

- ・ 長尺U字溝で施工が早い

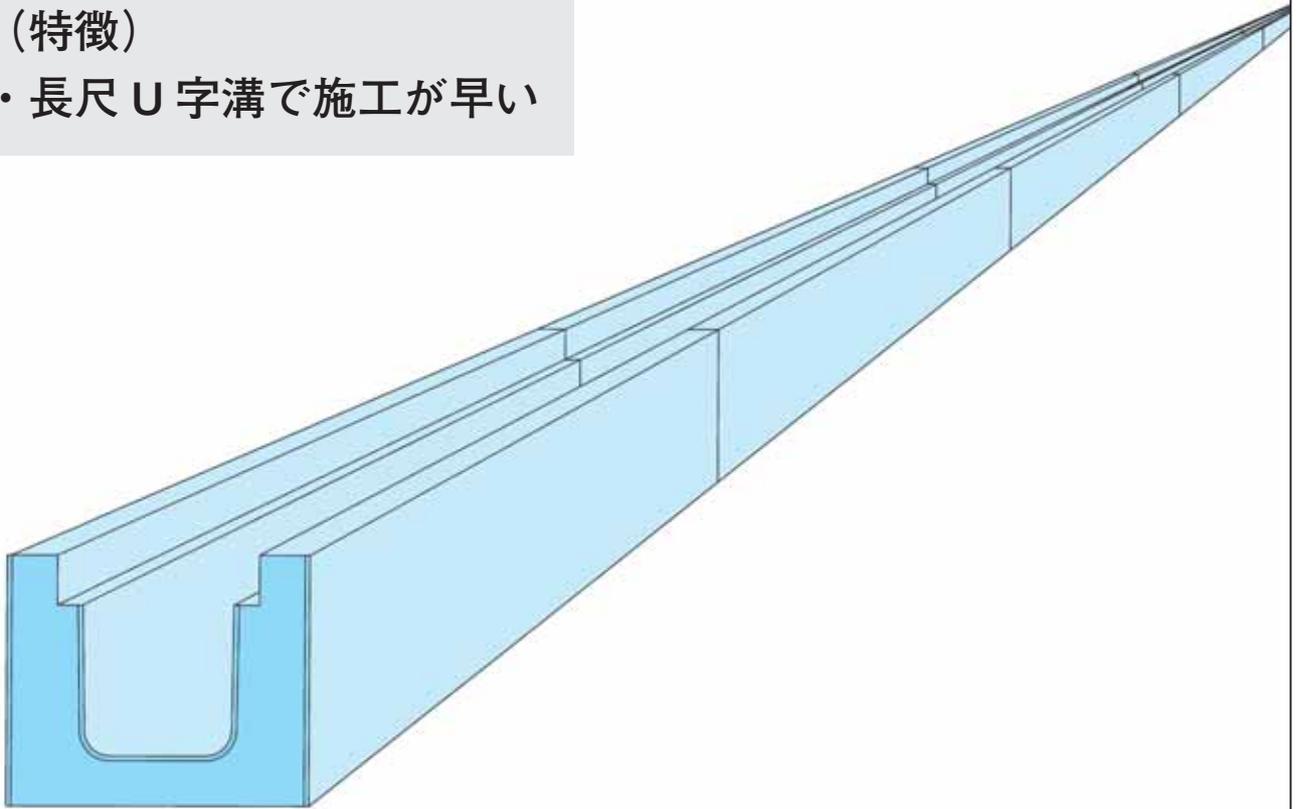


(特徴)

- ・ 底版の張出しがなく土地を有効に使える

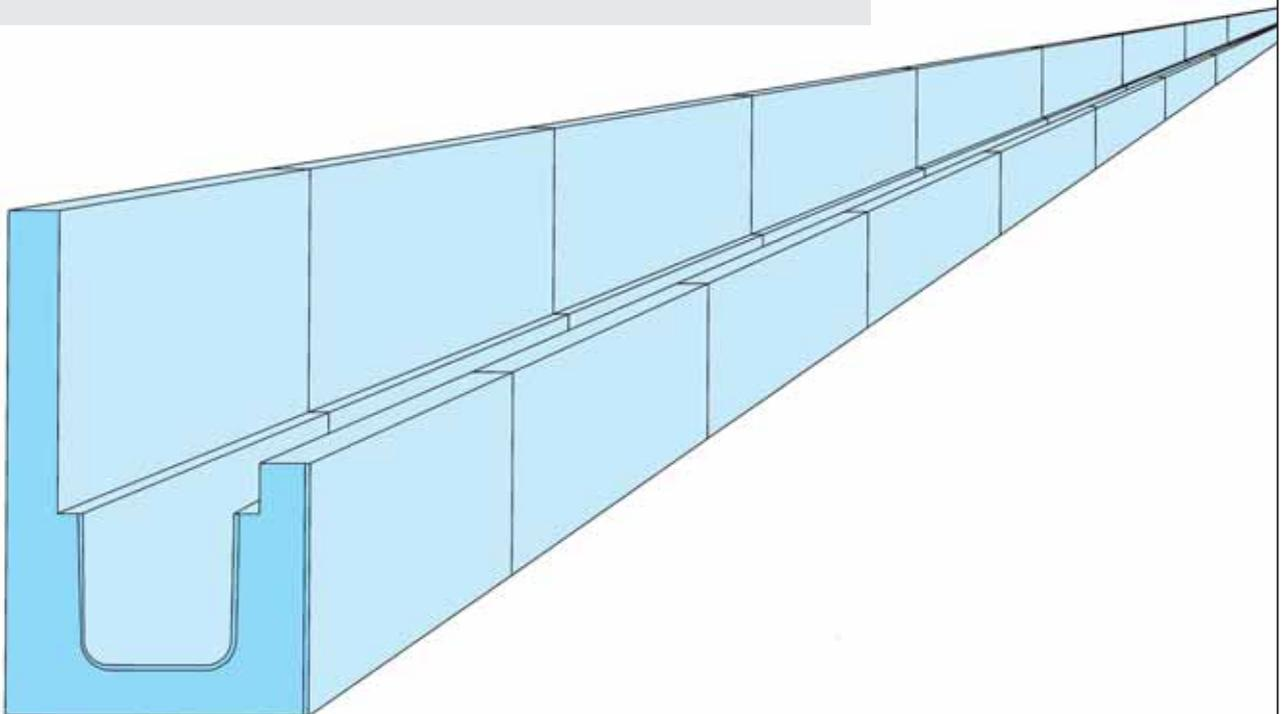


鉄筋コンクリート大丸式ロング U 横断用 (D 型) 150×150

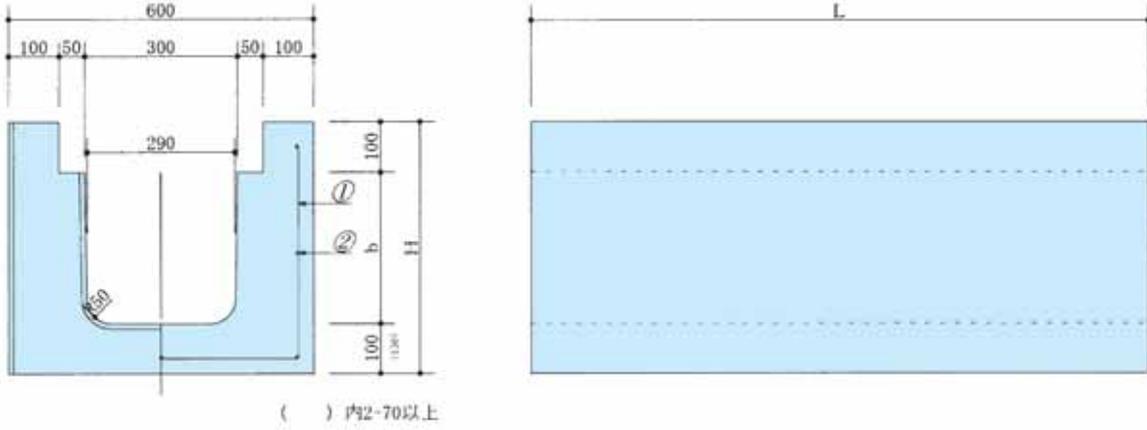


呼び名	寸 法 表 (単位mm)			鉄 筋		1 本当り 参考重量 (kg)
	L	b	H	①	②	
D 4 - 30	4,000	300	500	φ 5 - 16	φ 5 - 7	1,630
D 4 - 40	4,000	400	600	φ 5 - 24	φ 5 - 7	1,920
D 2 - 50	2,000	500	700	φ 6 - 10	φ 5 - 7	1,100
D 2 - 60	2,000	600	800	φ 6 - 14	φ 6 - 7	1,250
D 2 - 70	2,000	700	950	D10 - 8	φ 6 - 12	1,530

※受注生産

コンクリート蓋

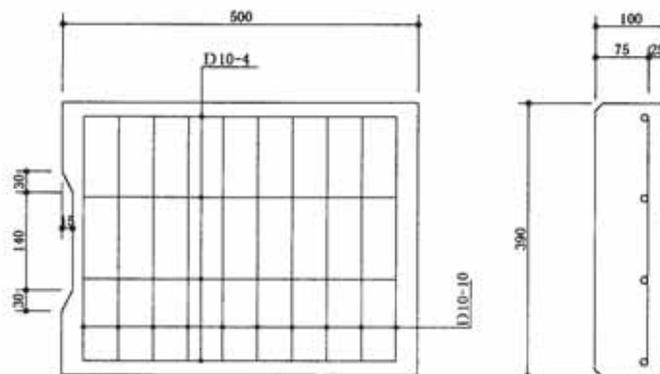



特殊ロングU

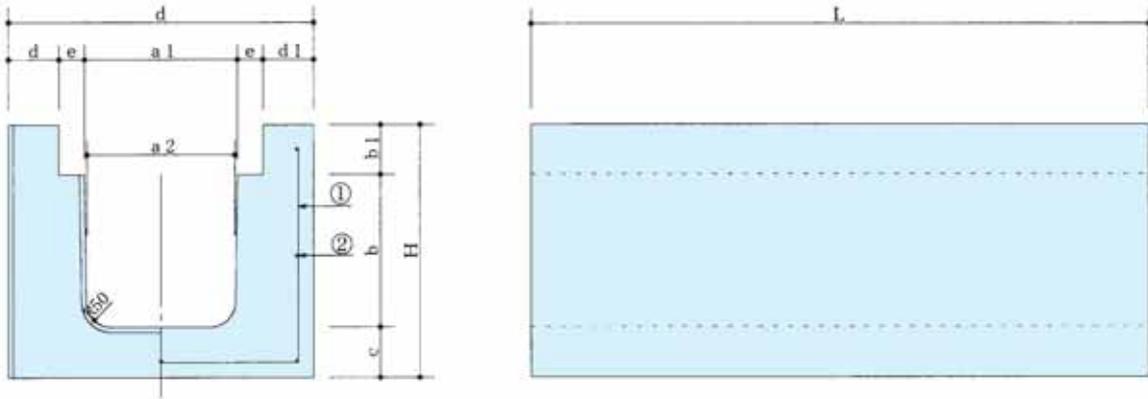

呼び名	寸法表 (mm)											鉄筋		1本当り 参考重量 (kg)
	L	a	a ¹	a ²	b	b ¹	C	d	d ¹	e	H	①	②	
D2-30×30 (15×15)	2000	600	300	290	300	130	100	80	80	70	530	φ 5-9	φ 5-9	820
D2-30×40 (")	2000	600	300	290	400	130	100	80	80	70	630	φ 5-10	φ 5-9	960
D2-30×50 (")	2000	600	300	290	500	130	100	80	80	70	730	φ 6-10	φ 5-9	1100
D2-30×60 (")	2000	600	300	290	600	130	100	80	80	70	830	φ 6-10	φ 5-10	1250
D2-40×40 (")	2000	700	400	390	400	130	100	80	80	70	630	φ 6-14	φ 5-10	1010
D2-40×50 (")	2000	700	400	390	500	130	100	80	80	70	730	φ 6-14	φ 5-10	1150
D2-40×60 (")	2000	700	400	390	600	130	150	80	80	70	880	D10-11	φ 6-11	1460
D2-50×50 (")	2000	800	500	490	500	130	150	80	80	70	780	D10-11	φ 6-9	1180
D2-60×60 (")	2000	900	600	590	600	150	150	80	80	70	900	D10-7	D10-9	1620
D2-70×70 (")	2000	1000	700	690	700	150	150	80	80	70	1000	D10-7	D10-12	1830
D2-80×80 (")	2000	1100	800	790	800	150	150	80	80	70	1100	D10-8	D10-12	2050

※受注生産

土止め付ロング U (HC タイプ) ・ (FC タイプ)

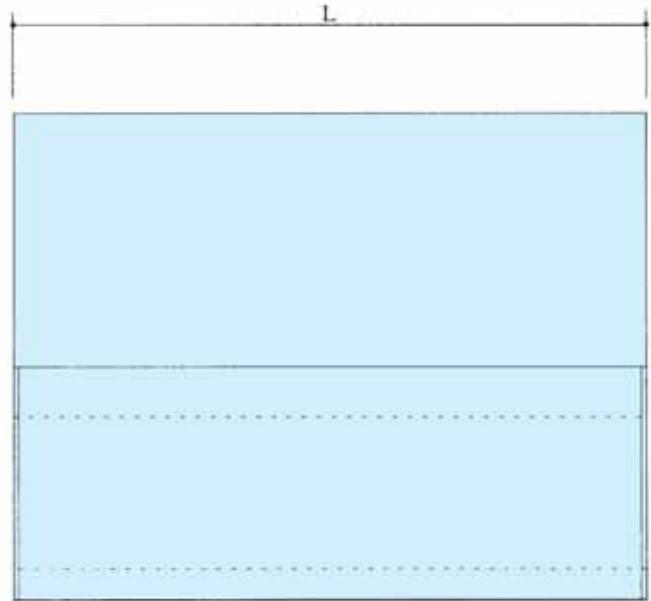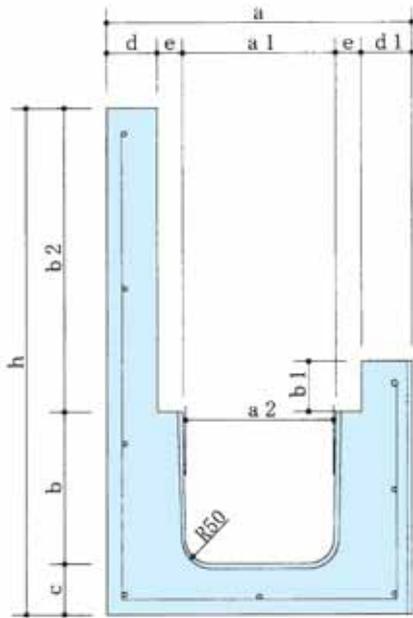

呼び名	寸 法 表 (単位mm)												1本当り 参考重量 (kg)
	L	a	a ¹	a ²	b	b ¹	b ²	c	d	d	e	h	
HC 2 -30	2,000	480	240	230	240	100	300	100	70	70	50	640	640
HC 2 -40	2,000	480	240	230	240	100	400	100	70	70	50	740	670
HC 2 -50	2,000	480	240	230	240	100	500	100	70	70	50	840	700
HC 2 -60	2,000	480	240	230	240	100	600	100	70	70	50	940	730
FC 2 -20	2,000	600	300	290	300	100	200	100	100	100	50	600	860
FC 2 -30	2,000	600	300	290	300	100	300	100	100	100	50	700	910
FC 2 -40	2,000	600	300	290	300	100	400	100	100	100	50	800	960
FC 2 -50	2,000	600	300	290	300	100	500	100	100	100	50	900	1,010
FC 2 -60	2,000	600	300	290	300	100	600	100	100	100	50	1,000	1,060